



WR625G

**AC1200**

**Whole Home Mesh**

**Wifi System**





**WR625G Mesh Router** is a gigabit dual-band mesh router. It adopts MTK mainstream chip solution. Its mesh protocol is based on the EasyMesh standard of the Wi-Fi Alliance.

It has the functions of self-organizing, self-repairing, and self-expanding. Mesh WIFI routers with multiple ethernet ports are perfectly matched and work together to eliminate signal dead spots, easily satisfying family scenes such as large flats, duplex, and villas, so that good signals can be achieved everywhere.

WR625G provides a maximum wireless access rate of 1200Mbps, 1 Gigabit WAN port, and 2 Gigabit LAN ports.

# Main Features



**Dual-band WiFi**



**IPV6**



**TR069**



**Gigabit Ports**



**Access Control**



**Multicast**



**MU-MIMO**



**OTA**




**MESH**



**Guest Wi-Fi**

# Indicator

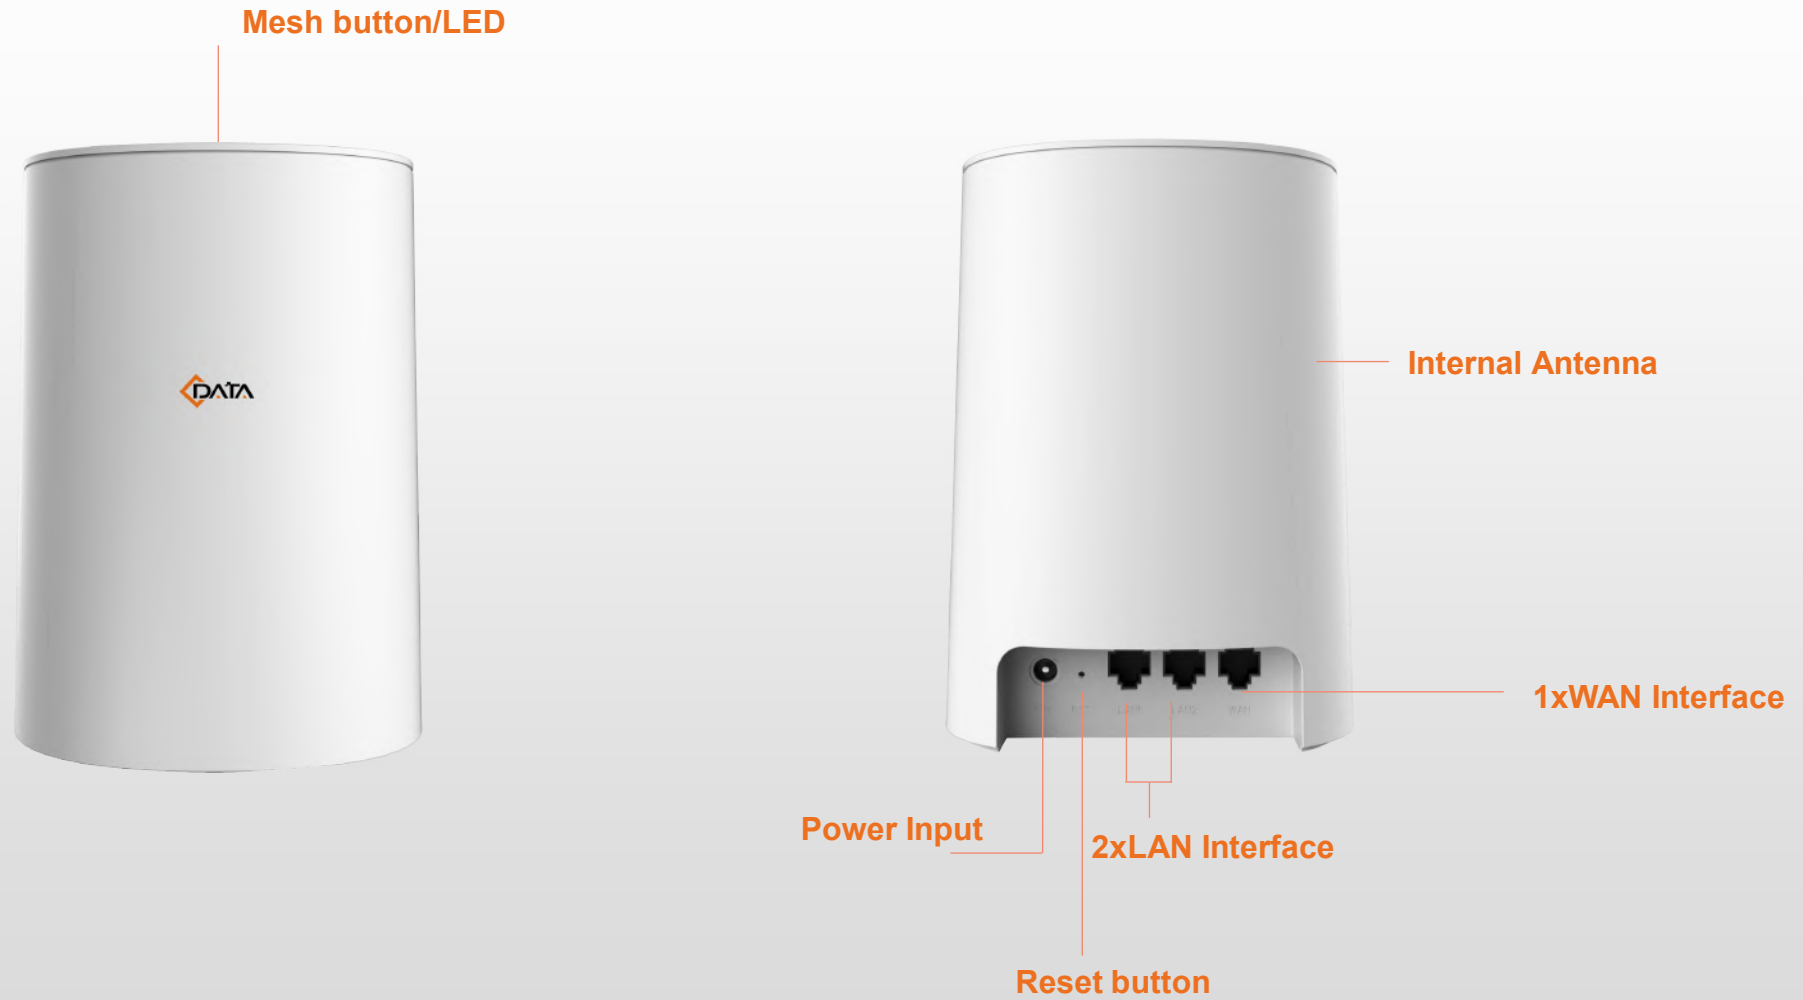

# Application scenario



## Place it anywhere, mesh networking

Automatically select the networking mode to ensure a better Internet experience.



# Hardware Features



<b>Name</b>	AC1200 Wireless Router
<b>Model</b>	WR625G
<b>CPU</b>	MTK CPU MT7621D
<b>Memory /Storage</b>	128MB/16MB
<b>Wi-Fi Antennas</b>	2×2.4GHz 2×5GHz Internal 3dBi Gain
<b>Protocol</b>	IEEE 802.11a/b/g/n/ac
<b>Wi-Fi Speed</b>	2.4G Wi-Fi (Speed 300Mbps) 5G Wi-Fi (Speed 867Mbps)
<b>MESH LED</b>	Blue Light Flashing: Mesh networking  Green Light Successfully connected Mesh

<b>Interface</b>	WAN	1 RJ45 port ,10/100/1000Mbps
	LAN	2 RJ45 port ,10/100/1000Mbps
	Mesh	Button
<b>Transmit Power</b>	2.4G	20dBm
	5G	20dBm
<b>Power Supply</b>	DC12V/1A Adapter	
<b>Power Consumption</b>	<10W	
<b>Dimension</b>	166x120x80mm	
<b>Operating Temperature</b>	-10 ~ 50°C	
<b>Storage Temperature</b>	-40 ~ 85°C	

# Software Features



<b>IP Protocols</b>	IPv4/IPv6	<b>Guest Wi-Fi</b>	2.4G Guest SSID 5G Guest SSID
<b>WAN Mode</b>	Dynamic IP Static IP PPPoE	<b>Parental Controls</b>	Limited Time DD/MM Monday to Sunday
<b>Security</b>	Firewall Access Control IP & MAC Binding MAC/IP/URL/Port Filter Application Layer Gateway DDoS Attack Prevention	<b>Equipment Mode</b>	Router Bridge Relay
<b>System Service</b>	DDNS Telnet Server DMZ Host UPnP Remote WEB OTA Upgrade Diagnosis NTP	<b>Management</b>	WEB Telnet TR069
		<b>System log</b>	System log
		<b>Multicast</b>	IPTV IGMP
		<b>QoS</b>	Speed limit
		<b>MESH</b>	EasyMesh

# Ordering Information



Product Model	Product Description
<b>WR625G</b>	1*10/100/1000Base-Tx Ethernet WAN port, 2*10/100/1000Base-Tx Ethernet LAN ports, external 4*3dBi antennas, support 2.4G/5G dual frequency, support 802.11 a/b/g/n/ac protocol, wireless transmission rate 1200Mbps, 12VDC power supply.

## Contact Us

---

Shenzhen C-Data Technology Co.,Ltd.  
Address: Floor 6, Building F, Songbai Road 1008,  
Sunshine Community, Xili Street, Nanshan District,  
Shenzhen(518108)

Tel: +86-755-26014509/4710/4711  
Fax:+86-755-26014506  
Email: [marketing@cdatatec.com](mailto:marketing@cdatatec.com)  
Website: [www.cdatatec.com](http://www.cdatatec.com)